

AutoSPREADER

Superior Safety & Versatility

Multi-Step Safety Block


Model S10K-SB Safety Blocks provide a safe and efficient operation when separating a flange. The operator can choose a desired width: 1", 2" or 3". The aluminum block is lightweight, and the handle can be easily gripped, even when wearing gloves.

When safety blocks are inserted into the gap of the flange, the AutoSPREADER is closed and the load is then transferred to the safety blocks, enabling the operator to work safely on the gasket surface.



Hydraulic Power Source

HS10K Hydraulic Flange Spreaders may be used in multiple units connected to a common pump. A load lowering valve controls the rate of travel. The optional isolation valves enable the operator to control each AutoSPREADER independently. All HS10K pumps, hoses and accessories are supplied with quick disconnects, filled and fully tested.

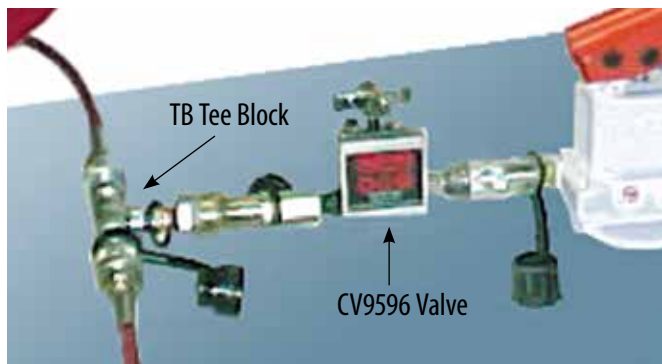

A 100H2 Pump with TB Tee Block, two hoses and CV9596 Load Lowering Valve are recommended for operating two HS10Ks simultaneously.



Hand Pump Model 100H2 is recommended to provide hydraulic power to a pair of HS10K AutoSPREADERS.

